

UCI


Sistemi chiller inverter a velocità variabile.
Chiller inverter system with variable speed
32.000 - 70.000 BTU/h



Quadro elettrico
Electrical box



Comando remoto
Remote control

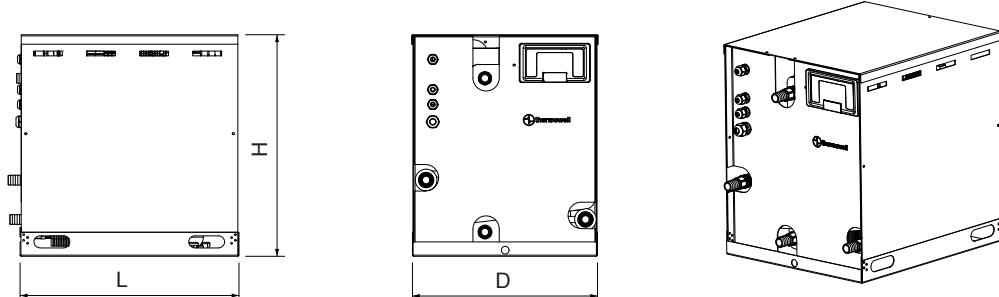

Caratteristiche tecniche Specifications

Model	UCI-32H	UCI-52H	UCI-72	UCI-125
Nominal cooling capacity BTU/h	9000 - 32000	15000 - 52000	21000-70000	32000-125000
Nominal heating capacity kW	2,7 - 11	4,0 - 19,2	6,1 - 26	9,4 - 48
Nominal cooling power input kW	0 - 2,2	0 - 4,2	0 - 6,1	0 - 13
Power supply +/-10%	230/1/50-60Hz	230/1/50-60Hz	230/1/50-60Hz	380/3/50-60Hz
Power consumption A	0 - 10	0 - 18	0 - 24	0 - 18
Power consumption (start) A	<2	<2	<2	<2
Fresh water flow m ³ /h**	1,8	2,2	3,2	6,1
Sea water flow m ³ /h	1,9	2,8	3,8	6,5
Sea water temperature (heating mode)	>5°C	>5°C	>5°C	>5°C
Sea water temperature (cooling mode)	<38°C	<38°C	<38°C	<38°C
Sea water connections	3/4"/19mm	3/4"/19mm	3/4"/19mm	1 1/4"/32mm
Chilled water connections	3/4" / 19mm	3/4" / 19mm	3/4" / 19mm	1 1/4" /32mm
Net weight kg	60	63	68	82
Sizes LxDxH mm	450x380x463	450x380x463	450x380x463	700x400x600
Control box sizes LxDxH mm	Included in Size	Included in Size	Included in Size	Included in Size
Recommended fuse size A	25	32	32	50
Drain connection mm	16	16	16	16

Le specifiche tecniche e la disponibilità sono soggette a modifiche senza preavviso. Le unità chiller includono quadro elettrico e display. Le capacità sono stimate a una temperatura di evaporazione di 7,2°C e di condensazione di 38°C. Le dimensioni del chiller non includono il quadro elettrico. Il flusso di acqua dipende dal totale dei fan coil.

Specification and availability are subject to change without notice. Chiller units include control box and display. Capacities are rated at an evaporating temperature of 7,2°C and a condensation temperature of 38°C. Dimensions of the chillers are without control box. Fresh water flow depend on amount of air handlers.

Schema di installazione Installation scheme

